



fatkhurokhman fauzi <fatkhurokhmanf@unimus.ac.id>

---

## [JTAM] Editor Decision

1 message

---

**Syahrudin Syahrudin** <aum.ummat@gmail.com>

Sat, Mar 30, 2024 at 9:37 AM

To: fatkhurokhman fauzi <fatkhurokhmanf@unimus.ac.id>

Cc: Relly Erlinda <rellyerlinda@gmail.com>, Prizka Rismawati Arum <prizka.rismawatiarum@unimus.ac.id>

fatkhurokhman fauzi:

We have reached a decision regarding your submission to JTAM (Jurnal Teori dan Aplikasi Matematika), "Rainfall Forecasting Using an Adaptive Neuro-Fuzzy Inference System with a Grid Partitioning Approach to Mitigating Flood Disasters".

Our decision is: Revisions Required

Syahrudin Syahrudin

[Scopus ID: 57204821706], Universitas Muhammadiyah Mataram

[syahrudin.ntb@gmail.com](mailto:syahrudin.ntb@gmail.com)

---

Editor in Chief

Syahrudin [+62 87864003847]

<http://journal.ummat.ac.id/index.php/jtam>

Universitas Muhammadiyah Mataram, Indonesia

=== Indexing ===

DOAJ : <https://doaj.org/toc/2614-1175>

SINTA : <https://sinta.kemdikbud.go.id/journals/profile/4258>

Scholar : <https://scholar.google.co.id/citations?user=jBI0ltgAAAAJ>



# Rainfall Forecasting Using an Adaptive Neuro-Fuzzy Inference System with a Grid Partitioning Approach to Mitigating Flood Disasters

## ABSTRACT

### Article History:

Received : D-M-20XX  
 Revised : D-M-20XX  
 Accepted : D-M-20XX  
 Online : D-M-20XX

### Keyword:

ANFIS;  
 Grid Partitioning;  
 Forecasting;  
 Rainfall;



Hydrometeorological disasters are one of the disasters that often occur in big cities like Semarang. The hydrometeorological disaster that often occurs is flooding, caused by the high intensity of rainfall in the area. Early mitigation needs to be done by knowing future rainfall. Rainfall data in Semarang City fluctuates, so the Adaptive Neuro-Fuzzy Inference System (ANFIS) method approach is very appropriate. This research will use the Grid Partitioning (GP) approach to produce more accurate forecasting. The membership functions used are Gaussian and Generalized Bell. The two membership functions will be compared based on the RMSE and MAPE values to get the best one. The data used in this research is daily rainfall data. Rainfall in Semarang City every month experiences anomalies which can result in flood disasters. The ANFIS-GP method with a Gaussian membership function is the best, with an RMSE value of 0.0898 and a MAPE of 5.2911. Based on the forecast results for the next thirty days, a rainfall anomaly of 102.53 mm on the thirtieth day could cause a flood disaster.

**Commented [U1]:** The author needs to mention the subjects or participants of the research, for example whether it uses observational data or simulation models, and whether the research involves human participation or not.

Crossref  
<https://doi.org/10.31764/jtam.vXiY.ZZZ>



This is an open access article under the **CC-BY-SA** license

## A. INTRODUCTION

Rainfall is water droplets that fall from a group of clouds over a certain period above the ground surface and is measured in millimetres in height (Pendergrass, 2018). Rain has positive and negative impacts on society; one of the negative impacts is flooding. Several factors influence rainfall such as temperature, humidity and wind speed in each region (Rohmana et al., 2019).

Semarang is one of the regions in Indonesia that is prone to being affected by hydrometeorological disasters such as floods (Hidayat et al., 2018). El Nino Southern Oscillation (ENSO) is closely related to hydrometeorological phenomena such as rainfall in Semarang (Hidayat et al., 2018). On the other hand, climate change makes hydrometeorological disasters worse (Suryadi et al., 2017). In recent years, Semarang has experienced frequent flood disasters; it was recorded that seven sub-districts experienced flooding in 2022 due to high rainfall.

Predicting future rainfall intensity is very important to prepare for mitigation. There are many techniques used to make predictions, such as linear regression, Autoregressive Integrated Moving Average (ARIMA), Artificial Neural Network (ANN) and artificial neural networks (ANN) (Chukwueloka & Nwosu, 2023; Yolanda & Kariyam, 2023). The characteristics of rainfall data do not follow a normal distribution, so the ARIMA approach does not work

optimally. Nonlinear methods like the Adaptive Neuro Fuzzy Inference System (ANFIS) will work better than ARIMA.

ANFIS research works well in capturing the variability that exists in rainfall. A study conducted in Sudan used ANFIS to develop a long-term weather forecast model to predict rainfall. This study used monthly meteorological data from 2000 to 2012 for 24 meteorological stations spread across the country. The research results show that ANFIS can capture the dynamic behaviour of rainfall data and provide satisfactory results (Bushara & Abraham, 2015). The ANFIS method was applied by Suparta and Samah (Sanikhani et al., 2012) to predict rainfall in Tangerang with an accuracy of 80%.

ANFIS can be combined with other methods to obtain more accurate results. The ANFIS method can be combined with grid partitioning, subtractive clustering, and fuzzy c-means clustering methods. Sanikhani et al. (Sanikhani et al., 2012) compared ANFIS with grid partitioning, ANFIS with subtractive clustering, and ANFIS with fuzzy c-means clustering. The results show that ANFIS with grid partitioning is better than ANFIS with subtractive clustering and ANFIS with fuzzy c-means clustering. Several studies have applied the ANFIS method (Abebe & Endalic, 2023; Sahoo et al., 2023; Yildirim et al., 2022).

The urgency of accurate forecasting to mitigate hydrometeorological disasters is very important. So, this research will use ANFIS with a grid partitioning approach. Generating rules using a grid partitioning approach avoids the curse of dimensionality in forecasting and is expected to produce maximum accuracy. The ANFIS-GP model will be evaluated with Root Mean Square Error (RMSE) and Mean Absolute Percentage Error (MAPE). The best model will be used to forecast the next thirty days.

## B. METHODS

### 1. Data and Variable

This research uses secondary data from the Central Java Province Meteorology, Climatology and Geophysics Agency (BMKG) website. Data was taken from January 2021 to December 2022; the data taken is daily data. Data is divided into two, namely, in-sample and out-sample. The in-sample data is 609 for January 2021 to August 2022. Meanwhile, the out-sample data is 121, which is data for September to December 2022. The variables used in this research are rainfall, temperature, humidity and wind speed.


### 2. Data and Variable

The first step taken in this research was data preprocessing. Data preprocessing is carried out on missing data. Missing Value in this study was handled by averaging the values on the exact dates and months in different years (Hadeed et al., 2020). Precipitation, temperature, humidity, and wind speed are seasonal variables. This approach to handling missing values is very appropriate.

The next step is to determine the membership function. A membership function is a function that can work in mapping points in the input data to their membership values. Membership functions that are generally used and have advantages in representing and have broader capabilities in forming various forms of distribution are Gaussian and Generalized Bell membership functions (Gupta et al., 2023).

**Commented [U2]:** We found some paragraphs lacking in-depth discussion. You can join paragraphs that share the same main idea if you find it difficult to develop it.


**Commented [T3]:** Please use high resolution figure (Figure 1,2,3). Please replace this image with a good resolution one.

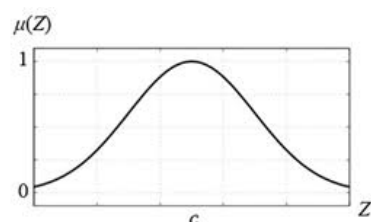

**Figure 1.** Gaussian Membership Function. (Gupta et al., 2023)

$$\mu(Z) = e^{-\frac{1}{2} \left( \frac{Z-c}{\sigma} \right)^2} \quad (1)$$

The Gaussian membership function, as in Figure 1, is formed from two parameters, namely  $\sigma$  and  $c$ . Where  $\mu(Z)$  is the degree of membership of a variable  $Z$ ,  $\sigma$  is the variance, and  $c$  is the mean.

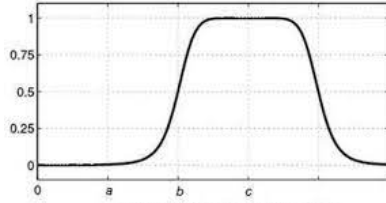**Figure 2.** Generalized Bell Membership Function (Gupta et al., 2023)

$$\mu(Z) = \frac{1}{1 + \left| \frac{Z-c}{a} \right|^{2b}} \quad (2)$$

The curve in Figure 2 is formed from 3 parameters, namely  $a$ ,  $b$  and  $c$ . Where  $\mu(Z)$  is the degree of membership of a variable, parameter  $b$  is positive, and parameter  $c$  indicates the center and middle value.

The third step is to model rainfall data using the ANFIS method. ANFIS functionally has almost the same architecture as the fuzzy rule base model and has almost the same construction as a neural network that contains radial functions (Zhu et al., 2022). A linear combination of radial basis functions of input and neuron parameters is the output of this network. If it is assumed that the fuzzy inference system has two inputs,  $x$ , and  $y$ , and has one output,  $f$ , then according to the Sugeno order I model, there are two rules as follows (Zhu et al., 2022):

$$\begin{aligned} \text{Rule 1} &= \text{If } x \text{ is } A_1 \text{ and } y \text{ is } B_1, \text{ then } f_1 = p_1x + q_1y + r \\ \text{Rule 2} &= \text{If } x \text{ is } A_2 \text{ and } y \text{ is } B_2, \text{ then } f_2 = p_2x + q_2y + r \end{aligned}$$

The neural network in the ANFIS method has the same function as a fuzzy inference system. To update the parameters in the fuzzy inference system, a learning process in a neural network is used with several data pairs. The ANFIS network consists of several layers, as shown in Figure 3 below (Guerra et al., 2022):

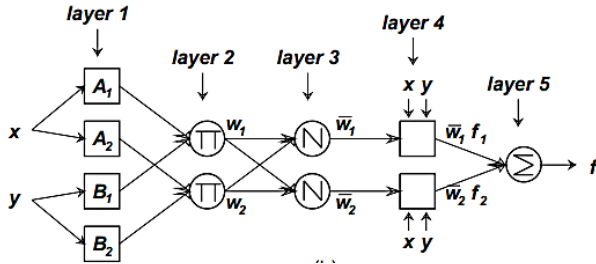


Figure 3. ANFIS architecture

**Layer 1**

The first layer is called the fuzzification layer and is the input layer. The membership degree is the output of each neuron given by the input membership function. For example, one of the membership functions is Generalized Bell. The shape of the Generalized Bell curve will change if the values of these parameters change. These parameters are called premise parameters.

**Layer 2**

The second layer, called the fuzzification layer, in the form of fixed neurons (with the symbol  $\Pi$ ), is the product of all input, which is formulated as follows:

$$w_i = \mu_{A_i} \cdot \mu_{B_i} \tag{3}$$

Where  $w_i$  is the  $i^{th}$  node,  $\mu_{A_i}$  is a signal from the  $i$ th layer  $A$  neuron. In general, we use the AND type operator.

**Layer 3**

This layer called the fuzzy reasoning layer, is a fixed neuron (with the symbol  $N$ ), which is the result of calculating the ratio of the  $i^{th}$  firing strength ( $w_i$ ) to the sum of the total firing strengths in the second layer with the following formula:

$$\bar{w}_i = \frac{w_i}{w_1 + w_2}, i = 1, 2 \tag{4}$$

Where  $\bar{w}_i$  is the normalized firing strength, the results of the calculations in the third layer are called normalized firing strength.

**Layer 4**

The layer, which is called the reconciliation fuzzy layer, is in the form of neurons, which are adaptive neurons to an output, which is formulated as follows:

$$\bar{w}_i f_i = w_i (p_i Z_{1,t} + q_i Z_{2,t} + r_i) \tag{5}$$

Where  $\bar{w}_i$  is the normalized firing strength in the third layer, and  $p_i$ ,  $q_i$ , and  $r_i$  are the parameters in the neuron. These parameters are called consequent parameters.

**Layer 5**

In the fifth layer, a single neuron (with the symbol  $\Sigma$ ) is the result of the sum of all the outputs in the fourth layer, which is formulated as follows:

$$\sum_i \bar{w}_i f_i = \frac{\sum_i w_i f_i}{\sum_i w_i} \tag{6}$$

$w_i$  is the normalized firing strength.  $\gamma_i w_i f_i$  is the result of the sum of the output on layer 4. Meanwhile,  $\gamma_i w_i$  is the result of the output sum on layer 3.

The final step in this research is to evaluate the model using Root Mean Square Error (RMSE) and Mean Absolute Percentage Error (MAPE) (Fatkhurokhman Fauzi et al., 2023; Kharisudin et al., 2023). RMSE and MAPE calculations were performed on in-sample and out-sample data to determine the model's goodness. After knowing the model's goodness, the next step is forecasting rainfall for the next month.

$$RMSE = \sqrt{\frac{\sum_{i=1}^n |X_t - \hat{X}_t|^2}{n}} \quad (7)$$

$$MAPE = \frac{1}{n} \sum_{i=1}^n \frac{|X_t - \hat{X}_t|}{X_t} \times 100\% \quad (8)$$

where  $X_t$  is actual data,  $\hat{X}_t$  is forecasting data,  $n$  is lots of data.


### C. RESULT AND DISCUSSION


The results and discussion in this research are divided into two parts, namely descriptive statistics and modeling using the Adaptive Neuro-Fuzzy Inference System (ANFIS) method. Descriptive statistics discuss the general description of the research variables. Meanwhile, ANFIS modeling discusses determining the best model and forecasting.

#### 1. Descriptive Statistics

The rainfall pattern in the city of Semarang is of the monsoon type; this type theoretically has peak rainfall from December to February (Kusumawardhani & Gernowo, 2015). Based on Figure 4(a), it can be seen that the highest rainfall is in December-February, but anomalies often occur in certain months. However, in recent years, the monsoon rainfall type has shifted in peak rainfall caused by climate change and El Nino or Lanina.

Rainfall anomalies often occur in the city of Semarang due to its location, which borders directly on the Java Sea. Anomalies often occur every month throughout 2021. The highest anomaly occurred in June 2021 at 171 mm<sup>2</sup>. Several factors that cause rainfall anomalies include climate change, atmospheric stability, population density, and local topography (Harada et al., 2020; Lakshmi & Schaaf, 2001; Lima et al., 2017; Zhao et al., 2019). Rainfall anomalies in Indonesia significantly impact the agricultural sector, especially food crop production (Dirgahayu et al., 2012).

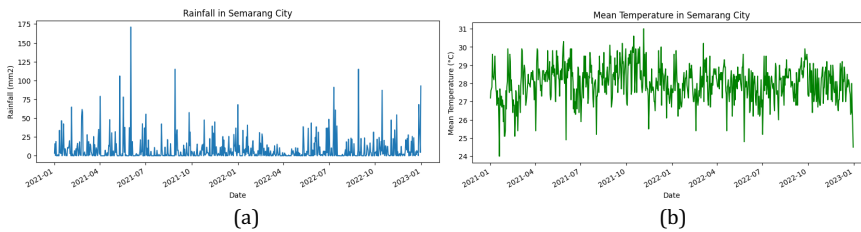

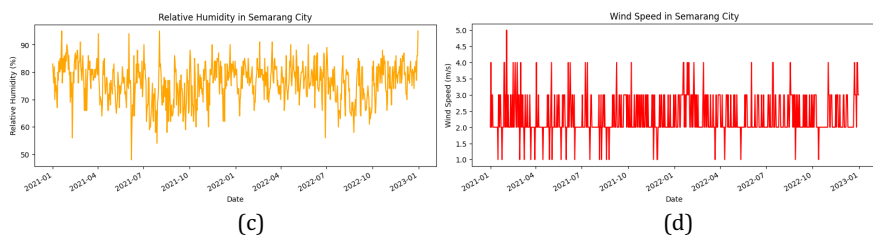

**Figure 4.** Time Series Plot of (a) Rainfall, (b) Mean Temperature, (c) Relative Humidity, and (d) Wind Speed


Temperature and relative humidity have a negative correlation. The relationship between these two variables is inversely proportional; if the temperature is high, then the relative humidity is low (see Figures 4(b) and 4(c)). The average temperature in Semarang over the last two years was 28.01°C, while the actual humidity was 76.2%. The highest temperature for two years was 31°C, while the lowest was 24°C.

**Table 1.** Descriptive Statistics

Variable	Mean	Maximum	Minimum
Mean Temperature	28.01	31	24
Relative Humidity	76.2	95	48
Wind Speed	2.322	5	1
Rainfall	7.854	171	0

**2. Rainfall Modeling Using the ANFIS Method**

In predicting rainfall in Semarang, a model will be created using the Adaptive Neuro-Fuzzy Inference System (ANFIS) method with a grid partitioning (GP) approach. After obtaining the best model, the smallest RMSE and MAPE values will be selected for the membership function, which will then be used for predictions. The following is a drawing of the ANFIS architecture:

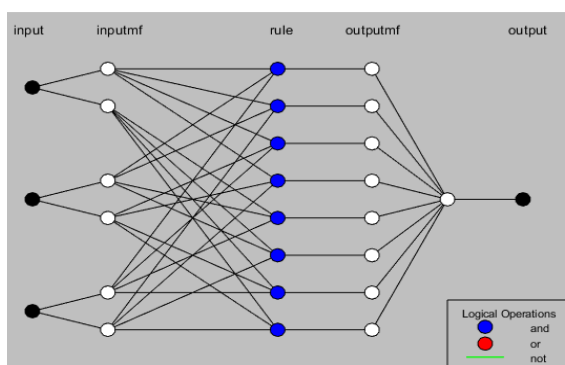

**Figure 5.** ANFIS Architecture for Rainfall Prediction

The first stage in the ANFIS method is fuzzification, where the input data with a set of classical numbers will be converted into fuzzy numbers. In this layer, the membership function that will be used will be determined. This process will produce nonlinear

parameters for each membership function or premise parameter to convert classical numbers into fuzzy numbers.

In this research, Gaussian and Generalized Bell membership functions are used. The parameters  $\sigma$  and  $c$  are in the Gaussian membership function for nonlinear parameter values produced by the Generalized Bell membership function, which has three parameters:  $\sigma$ ,  $b$ , and  $c$ .

**Table 2.** Non-Linear Parameter Values of Gaussian Membership Functions

Input	$\sigma$	$c$
Input 1 mf 1 (A1)	0.009887	0.0132
Input 1 mf 2 (A2)	0.01914	0.1766
Input 2 mf 1 (B1)	0.1197	0.2835
Input 2 mf 2 (B2)	0.1184	0.5564
Input 3 mf 1 (C1)	0.01058	0.006946
Input 3 mf 2 (C2)	0.00107	0.03353

The parameters resulting from the backward flow process are optimal. The respective nonlinear parameters differ according to the two membership functions used. Parameter values are used to determine the degree of membership. The three inputs used each have two membership functions so that six groups of degrees of membership are produced.

**Table 3.** Non-Linear Parameter Values of Generalized Bell Membership Function

Input	$\sigma$	$b$	$c$
Input 1 mf 1 (A1)	0.01093	2	0.126
Input 1 mf 2 (A2)	0.02314	2	0.173
Input 2 mf 1 (B1)	0.1414	2	0.2848
Input 2 mf 2 (B2)	0.1359	2	0.5588
Input 3 mf 1 (C1)	0.01062	2	0.005964
Input 3 mf 2 (C2)	0.006666	2	0.03134

The second step in the ANFIS method is to determine the rules. In this study, a grid partition approach was used. In Figure 5, it is found that the number of rules is eight, where the rules are obtained from the number of memberships of two raised to the power of the number of input variables of three. The following are the rules used:

$$\begin{aligned}
 R_{111}^2 &= IF T_{avg} \text{ is } A_1^2 \text{ AND } RH_{avg} \text{ is } A_1^2 \text{ AND } ff_{avg} \text{ is } A_1^2 \text{ THEN } C \\
 R_{112}^2 &= IF T_{avg} \text{ is } A_1^2 \text{ AND } RH_{avg} \text{ is } A_1^2 \text{ AND } ff_{avg} \text{ is } A_2^2 \text{ THEN } C \\
 R_{121}^2 &= IF T_{avg} \text{ is } A_1^2 \text{ AND } RH_{avg} \text{ is } A_2^2 \text{ AND } ff_{avg} \text{ is } A_1^2 \text{ THEN } C \\
 R_{122}^2 &= IF T_{avg} \text{ is } A_1^2 \text{ AND } RH_{avg} \text{ is } A_2^2 \text{ AND } ff_{avg} \text{ is } A_2^2 \text{ THEN } C \\
 R_{211}^2 &= IF T_{avg} \text{ is } A_2^2 \text{ AND } RH_{avg} \text{ is } A_1^2 \text{ AND } ff_{avg} \text{ is } A_1^2 \text{ THEN } C \\
 R_{212}^2 &= IF T_{avg} \text{ is } A_2^2 \text{ AND } RH_{avg} \text{ is } A_1^2 \text{ AND } ff_{avg} \text{ is } A_2^2 \text{ THEN } C \\
 R_{221}^2 &= IF T_{avg} \text{ is } A_2^2 \text{ AND } RH_{avg} \text{ is } A_2^2 \text{ AND } ff_{avg} \text{ is } A_1^2 \text{ THEN } C \\
 R_{222}^2 &= IF T_{avg} \text{ is } A_2^2 \text{ AND } RH_{avg} \text{ is } A_2^2 \text{ AND } ff_{avg} \text{ is } A_2^2 \text{ THEN } C
 \end{aligned}$$

$R$  is the rule label,  $T_{avg}$  is temperature,  $RH_{avg}$  is humidity, and  $ff_{avg}$  is wind speed.  $A_i^K$ ,  $A_j^K$ ,  $A_k^K$  are premises.  $C$  is conclusion.



The next step is defuzzification, which involves returning fuzzy numbers to classical numbers using linear or consequent parameters resulting from the forward learning process. In contrast to nonlinear parameters, the linear parameters produced at this stage have the exact quantities, namely  $p_i, q_i, r_i, s_i$ . The resulting parameters correspond to the number of rules used, namely eight rules, so there are eight groups of linear parameters.

**Table 4.** Linear Parameter Values of Gaussian Membership Function

Input	$p$	$q$	$r$	$s$
Output 1 mf 1	11.86	47.76	22.36	-17.16
Output 1 mf 2	-0.0893	-0.2887	-0.01679	-0.05741
Output 1 mf 3	90.19	43.71	-4.567	-37.24
Output 1 mf 4	-0.4328	-1.399	-0.08135	-2.782
Output 1 mf 5	2.016	-2.759	-8.215	0.6253
Output 1 mf 6	-0.8337	-2.695	-0.1567	-5.359
Output 1 mf 7	-2.983	-2.833	4.883	1.986
Output 1 mf 8	-4.04	-13.06	-0.7594	-25.97

Based on Table 4, the ANFIS equation with the Gaussian membership function can be written as follows:

$$\begin{aligned} \widehat{Z}_{1,i} = & w_1 Z_{1,i} + w_2 Z_{1,i} + w_3 Z_{1,i} + w_4 Z_{1,i} + w_5 Z_{1,i} + w_6 Z_{1,i} + w_7 Z_{1,i} + w_8 Z_{1,i} \\ & w_1(11.86X_{1,1} + 47.76X_{2,1} + 22.36X_{3,1} - 17.16) \\ & + w_2(-0.0893X_{1,1} - 0.2887X_{2,1} - 0.01679X_{3,1} - 0.05741) \\ & + w_3(90.19X_{1,1} + 43.71X_{2,1} - 4.567X_{3,1} - 37.24) \\ & + w_4(-0.4328X_{1,1} - 1.399X_{2,1} - 0.08135X_{3,1} - 2.782) \\ & + w_5(2.016X_{1,1} - 2.759X_{2,1} - 8.215X_{3,1} + 0.6253) \\ & + w_6(-0.8337X_{1,1} - 2.695X_{2,1} - 0.1567X_{3,1} - 5.359) \\ & + w_7(-2.983X_{1,1} - 2.833X_{2,1} + 4.883X_{3,1} + 1.986) \\ & + w_8(-4.04X_{1,1} - 13.06X_{2,1} - 0.7594X_{3,1} - 25.97) \end{aligned}$$

**Table 5.** Linear Parameter Values of Generalized Bell Membership Function

Input	$p$	$q$	$r$	$s$
Output 1 mf 1	21.14	-29.78	8.813	11.03
Output 1 mf 2	-5.278	-23.37	8.813	11.03
Output 1 mf 3	266.4	62.03	58.16	-71.74
Output 1 mf 4	1.06	75.21	-6.65	-34.79
Output 1 mf 5	3.895	-0.535	-4.015	-0.4056
Output 1 mf 6	-14.53	-1.672	44.9	2.088
Output 1 mf 7	-5.595	-0.9081	2.554	1.376
Output 1 mf 8	-26.78	-5.599	-16.01	7.576


Meanwhile, for the ANFIS equation, the Generalized Bell membership function is based on the parameter values in Table 5 as follows:

The ANFIS model with Gaussian and Generalized Bell membership function approaches is evaluated using the Root Mean Square Error (RMSE) and Mean Absolute Percentage Error (MAPE) values. The ANFIS model is good if it has small RMSE and MAPE values. The following is a comparison table of performance goodness between Gaussian and Generalized Bell membership functions.

**Table 6.** Comparison of RMSE and MAPE values

Membership Functions	RMSE	MAPE
Gaussian	<b>0.0898</b>	<b>5.2911</b>
Generalized Bell	0.0908	5.4205

Based on Table 6, it is found that the Gaussian membership function has the smallest RMSE and MAPE values. Figure 6 (red line and blue line) shows that the Gaussian Membership function can follow actual data. However, there are prediction errors on certain days caused by temperature, humidity, and wind speed, which change dynamically daily.

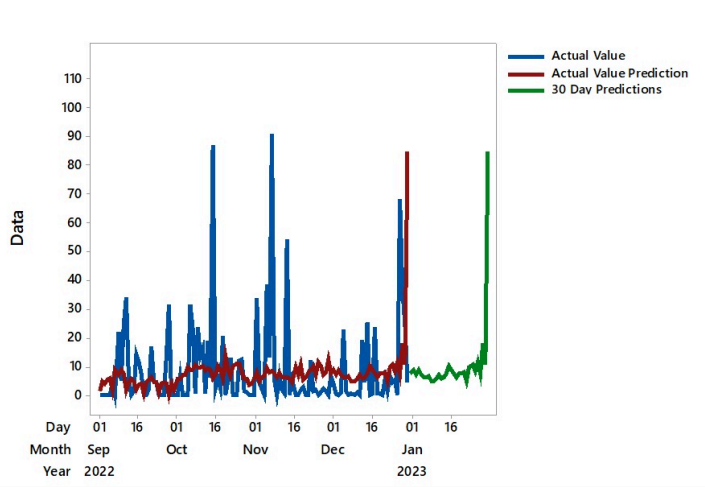**Figure 6.** Prediction with ANFIS-GP using Gaussian Membership Function

The next step is to predict with ANFIS with a Gaussian membership function. This research will predict rainfall for the next 30 days. Based on Figure 6 (green line), the highest daily rainfall for Semarang was 102.53 mm on January 31, 2023, and the lowest rainfall was 5.77 mm on January 9, 2023. A significant anomaly occurred on the 30th day because January is the rainy month in the monsoon zone.

**Commented [U4]:** We haven't seen you do a comparison between your research and previous research, whether it is supported or not.

#### D. CONCLUSION AND SUGGESTIONS

Rainfall in Semarang City fluctuates, and anomalies occur every month. Climate change events and El Nino or La Nina cause this anomaly. The adaptive neuro-fuzzy inference system (ANFIS) with a Grid Partitioning (GP) approach with a Gaussian membership function performs better than the generalized bell membership function. The RMSE and MAPE values obtained by ANFIS-GP with the Gaussian membership function are 0.0898 and 5.2911, respectively. The results of rainfall forecasting for the next 30 days experienced an anomaly on day 30 of 102.53 mm; this could cause hydrometeorological disasters such as flooding. For further research, other membership functions can be used to increase forecasting accuracy.

#### ACKNOWLEDGEMENT

The title for the thank you to the institution or the person who has contributed during the research and references is not numbered.

## REFERENCES

- Abebe, W. T., & Endalie, D. (2023). Artificial intelligence models for prediction of monthly rainfall without climatic data for meteorological stations in Ethiopia. *Journal of Big Data*, 10(1). <https://doi.org/10.1186/s40537-022-00683-3>
- Bushara, N. O., & Abraham, A. (2015). Using Adaptive Neuro-Fuzzy Inference System ( ANFIS ) to Improve the Long-term Rainfall Forecasting. <https://api.semanticscholar.org/CorpusID:28598909>
- Chukwueloka, E. H., & Nwosu, A. O. (2023). Modelling and Prediction of Rainfall in the North-Central Region of Nigeria Using ARIMA and NNETAR Model. In J. C. Egbueri, J. O. Ighalo, & C. B. Pande (Eds.), *Climate Change Impacts on Nigeria: Environment and Sustainable Development* (pp. 91–114). Springer International Publishing. [https://doi.org/10.1007/978-3-031-21007-5\\_6](https://doi.org/10.1007/978-3-031-21007-5_6)
- Dirgahayu, D., Jaya, I. N. S., Purwadhi, F. S. H., Ardiansyah, M., & Triwidodo, H. (2012). DETEKSI KONDISI KETAHANAN PANGAN BERAS MENGGUNAKAN PEMODELAN SPASIAL KERENTANAN PANGAN. *Journal of Natural Resources*, 2, 85. <https://api.semanticscholar.org/CorpusID:202167031>
- Fatkhurohman Fauzi, Dewi Ratnasari Wijaya, & Tiani Wahyu Utami. (2023). Brent Crude Oil Price Forecasting using the Cascade Forward Neural Network. *Jurnal RESTI (Rekayasa Sistem Dan Teknologi Informasi)*, 7(4), 964–969. <https://doi.org/10.29207/resti.v7i4.5052>
- Guerra, M. I. S., de Araújo, F. M. U., de Carvalho Neto, J. T., & Vieira, R. G. (2022). Survey on adaptative neural fuzzy inference system (ANFIS) architecture applied to photovoltaic systems. *Energy Systems*. <https://doi.org/10.1007/s12667-022-00513-8>
- Gupta, S., Biswas, P. K., Aljafari, B., Thanikanti, S. B., & Das, S. K. (2023). Modelling, simulation and performance comparison of different membership functions based fuzzy logic control for an active magnetic bearing system. *The Journal of Engineering*, 2023(2). <https://doi.org/10.1049/tje2.12229>
- Hadeed, S. J., O'Rourke, M. K., Burgess, J. L., Harris, R. B., & Canales, R. A. (2020). Imputation methods for addressing missing data in short-term monitoring of air pollutants. *Science of The Total Environment*, 730, 139140. <https://doi.org/https://doi.org/10.1016/j.scitotenv.2020.139140>
- Harada, Y., Endo, H., & Takemura, K. (2020). Characteristics of Large-Scale Atmospheric Fields during Heavy Rainfall Events in Western Japan: Comparison with an Extreme Event in Early July 2018. *Journal of the Meteorological Society of Japan. Ser. II*. <https://api.semanticscholar.org/CorpusID:225372844>
- Hidayat, A. M., Efendi, U., Agustina, L., & Winarso, P. A. (2018). KORELASI INDEKS NINO 3.4 DAN SOUTHERN OSCILLATION INDEX (SOI) DENGAN VARIASI CURAH HUJAN DI SEMARANG. *Jurnal Sains & Teknologi Modifikasi Cuaca*. <https://api.semanticscholar.org/CorpusID:126624024>
- Kharisudin, I., Fauzi, F., Iqbal, M., Arissinta, I. O., Khotilah, Z., & Alim, M. N. (2023). Electricity load forecasting using long short-term memory: Case study from Central Java and DIY. *AIP Conference Proceedings*, 2614(1), 040062. <https://doi.org/10.1063/5.0126313>
- Kusumawardhani, I., & Gernowo, R. (2015). ANALISIS PERUBAHAN IKLIM BERBAGAI VARIABILITAS CURAH HUJAN DAN EMISI GAS METANA (CH4) DENGAN METODE GRID ANALYSIS AND DISPLAY SYSTEM (GrADS) DI KABUPATEN SEMARANG. *YOUNGSTER PHYSICS JOURNAL*, 4, 49–54. <https://api.semanticscholar.org/CorpusID:128803532>
- Lakshmi, V., & Schaaf, K. (2001). Analysis of the 1993 midwestern flood using satellite and ground data. *IEEE Trans. Geosci. Remote. Sens.*, 39, 1736–1743. <https://api.semanticscholar.org/CorpusID:22718002>

Commented [U5]: Please complete the missing vol, issue, page in the reference section you used.

Formatted: Font: Not Italic

- Lima, C. H. R., Aghakouchak, A., & Lall, U. (2017). Classification of mechanisms, climatic context, areal scaling, and synchronization of floods: the hydroclimatology of floods in the Upper Paraná River basin, Brazil. *Earth System Dynamics Discussions*, 8, 1071–1091. <https://api.semanticscholar.org/CorpusID:991999>
- Pendergrass, A. G. (2018). What precipitation is extreme? *Science*, 360(6393), 1072–1073. <https://doi.org/10.1126/science.aat1871>
- Rohmana, S. F., Rusgiyono, A., & Sugito, S. (2019). PENENTUAN FAKTOR-FAKTOR YANG MEMPENGARUHI INTENSITAS CURAH HUJAN DENGAN ANALISIS DISKRIMINAN GANDA DAN REGRESI LOGISTIK MULTINOMIAL (Studi Kasus: Data Curah Hujan Kota Semarang dari Stasiun Meteorologi Maritim Tanjung Emas Periode Oktober 2018 – Maret 2019). *Jurnal Gaussian*. <https://api.semanticscholar.org/CorpusID:218853001>
- Sahoo, G. K., Patel, N., Panda, D., Mishra, S., Samantaray, S., & Satapathy, D. P. (2023). Streamflow Forecasting Using Novel ANFIS-GWO Approach. In V. Bhateja, X.-S. Yang, J. C.-W. Lin, & R. Das (Eds.), *Evolution in Computational Intelligence* (pp. 141–152). Springer Nature Singapore.
- Sanikhani, H., Kisi, O., Nikpour, M. R., & Dinpashoh, Y. (2012). Estimation of Daily Pan Evaporation Using Two Different Adaptive Neuro-Fuzzy Computing Techniques. *Water Resources Management*, 26(15), 4347–4365. <https://doi.org/10.1007/s11269-012-0148-4>
- Suryadi, Y., Sugianto, D. N., & Hadiyanto, H. (2017). *Identifikasi Perubahan Suhu dan Curah Hujan serta Proyeksinya di Kota Semarang*. <https://api.semanticscholar.org/CorpusID:127714976>
- Yildirim, A., Bilgili, M., & Ozbek, A. (2022). One-hour-ahead solar radiation forecasting by MLP, LSTM, and ANFIS approaches. *Meteorology and Atmospheric Physics*, 135(1), 10. <https://doi.org/10.1007/s00703-022-00946-x>
- Yolanda, V., & Kariyam. (2023). Comparison of seasonal ARIMA and fuzzy time series for rainfall prediction. *AIP Conference Proceedings*, 2720(1), 020021. <https://doi.org/10.1063/5.0136947>
- Zhao, Z., Jia, Z. F., Guan, Z., & Xu, C. L. (2019). The Effect of Climatic and Non-climatic Factors on Groundwater Levels in the Jinghuiqu Irrigation District of the Shaanxi Province, China. *Water*. <https://api.semanticscholar.org/CorpusID:164540591>
- Zhu, Z., Jin, D., Wu, Z., Xu, W., Yu, Y., Guo, X., & Wang, X. (Alice). (2022). Assessment of Surface Roughness in Milling of Beech Using a Response Surface Methodology and an Adaptive Network-Based Fuzzy Inference System. *Machines*, 10(7). <https://doi.org/10.3390/machines10070567>

- 99+
- Compose
- Mail
- Inbox 1,825
- Starred
- Snooked
- Sent
- Drafts 20
- Categories
- More

Labels

### Accepted & Published Fees [JTAM] External Inbox x



**JTAM Official** <jtam.ummat@gmail.com>  
to me, rellyerlinda, PRIZKA

[Translate to English](#) ✕

**Yth. Penulis JTAM Vol 8 No 2 April 2024**

Kami sampaikan bahwa paper Bapak/Ibu dengan paper ID **20385 DITERIMA** untuk dipublikasi di **JTAM Vol. 8, No. 2, 4** melakukan pembayaran biaya publikasi sebesar:

- Biaya Publikasi (Mak 12 halaman) = Rp1.500.000,
- Kelebihan halaman = 0 x Rp50.000 = Rp00.000 ([Lihat Author Fees](#)).
- == TOTAL =Rp1.500.385 ==**

Ditransfer ke **Rek Muamalat 7210056567 an. Syaharuddin** (Editor Chief), paling lambat tanggal **1 April 2024**. Mohor setelah mengirim bukti transfer biaya publikasi ke email [jtam.ummat@gmail.com](mailto:jtam.ummat@gmail.com)  
Silahkan isi form ini untuk mendapatkan Sertifikat sebagai penulis di JTAM: <https://bit.ly/3qwCptV>.

-----  
**Hormat kami,**  
**Editor-Chief JTAM**  
**Syaharuddin [Scopus ID 57204821706]**  
 -----

- Website : <https://journal.ummat.ac.id/index.php/jtam>
- DOAJ : <https://doaj.org/toc/2614-1175>
- SINTA : <https://sinta.kemdikbud.go.id/journals/profile/4258>
- Scholar : <https://scholar.google.co.id/citations?user=JB10ltgAAAAJ>



**JTAM Official** <jtam.ummat@gmail.com>  
to me, rellyerlinda, PRIZKA



fatkhurokhman fauzi <fatkhurokhmanf@unimus.ac.id>

**Biaya artikel paper ID 20385**

2 messages

fatkhurokhman fauzi <fatkhurokhmanf@unimus.ac.id>  
To: jtam.ummat@gmail.com

Mon, Apr 1, 2024 at 5:48 AM

paper ID **20385**  
**Atas nama fatkhurokhman fauzi dari universitas muhammadiyah semarang**



**2024040105455572635.jpg**  
205K

**JTAM Official** <jtam.ummat@gmail.com>  
To: fatkhurokhman fauzi <fatkhurokhmanf@unimus.ac.id>

Mon, Apr 1, 2024 at 9:41 AM

[Quoted text hidden]

 **20385-LoA JTAM-2024.pdf**  
305K



fatkhurokhman fauzi <fatkhurokhmanf@unimus.ac.id>

---

## [JTAM] Editor Decision

1 message

---

**JTAM Editorial Team** <aum.ummat@gmail.com>

Sun, Mar 31, 2024 at 3:16 PM

To: fatkhurokhman fauzi <fatkhurokhmanf@unimus.ac.id>

Cc: Relly Erlinda <rellyerlinda@gmail.com>, Prizka Rismawati Arum <prizka.rismawatiarum@unimus.ac.id>

fatkhurokhman fauzi:

We have reached a decision regarding your submission to JTAM (Jurnal Teori dan Aplikasi Matematika), "Rainfall Forecasting Using an Adaptive Neuro-Fuzzy Inference System with a Grid Partitioning Approach to Mitigating Flood Disasters".

Our decision is to: Accept Submission

JTAM Editorial Team  
Universitas Muhammadiyah Mataram  
[jtam.ummat@gmail.com](mailto:jtam.ummat@gmail.com)

---

Editor in Chief

Syharuddin [+62 87864003847]

<http://journal.ummat.ac.id/index.php/jtam>

Universitas Muhammadiyah Mataram, Indonesia

=== Indexing ===

DOAJ : <https://doaj.org/toc/2614-1175>

SINTA : <https://sinta.kemdikbud.go.id/journals/profile/4258>

Scholar : <https://scholar.google.co.id/citations?user=jBI0ltgAAAAJ>